
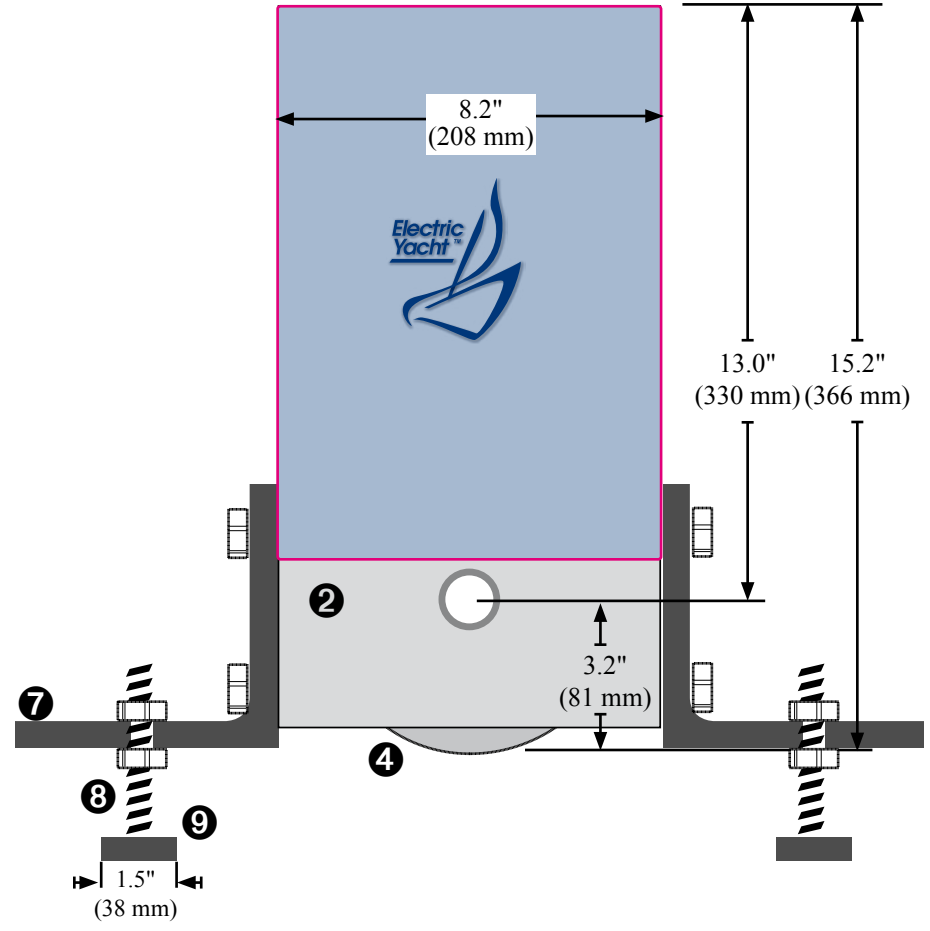


# Quietorque™ Model 180ibl

- 180 Amp continuous current rating
- 9 hp (6.9 kW) shaft output power
- 62 lbs (28 kg)
- Marine grade materials throughout

- For sailboats up to 35 feet (10.7 m) LOA, 14,000 lbs (6,350 kg)
- Plug and Play wiring simplifies installation
- Multiple reduction ratios allow for a precise match to existing propeller
- Digital battery monitor and single-lever throttle quadrant included
- 2 year limited warranty

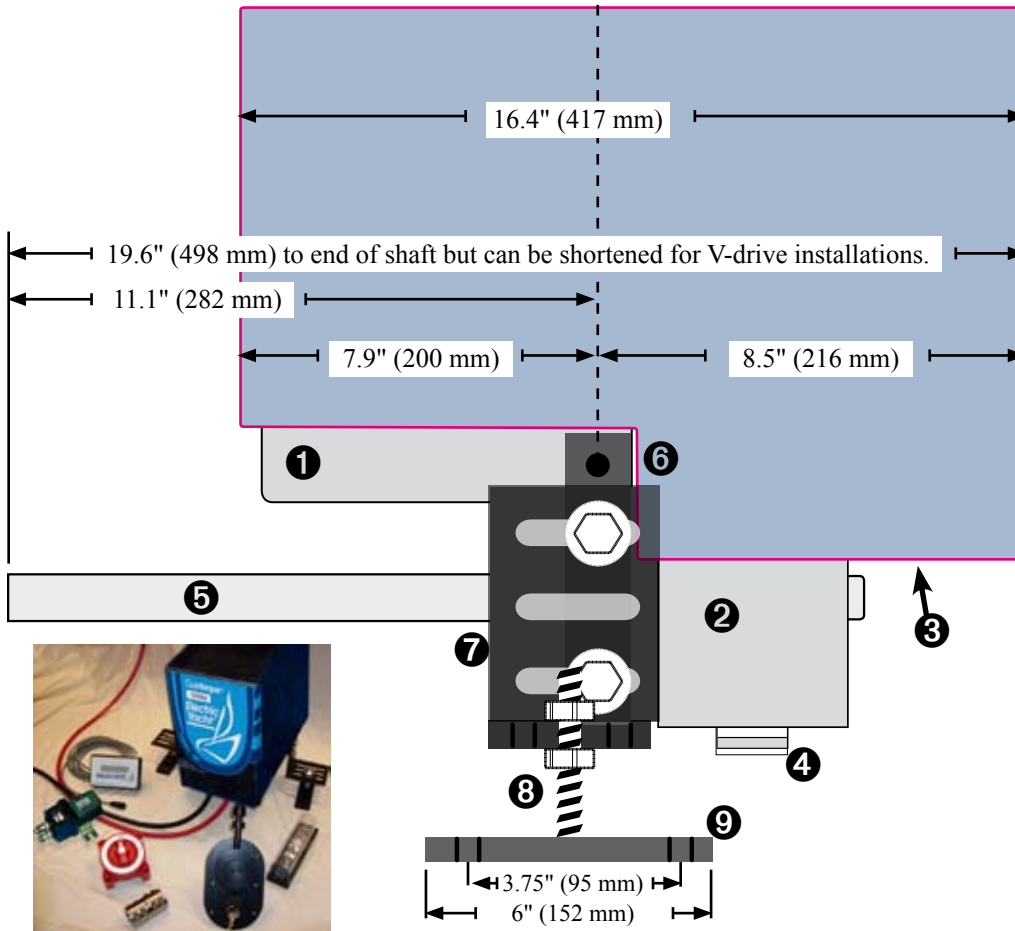

Components key	
➊ Motor	➕ Output shaft
➋ Belt-drive reduction housing	➖ Multi-hole receiving bracket
➌ Motor controller	➗ Slotted L-bracket
➍ Lower drive pulley	➘ Jackscrews
	➙ Stringer plate

### Mounting notes:

1. Clearance between motor mount stringers: min. 8.1" (208 mm), max. 17.0" (432 mm).
2. Spacers are provided for installations with clearance between stringers greater than 14.0" (356 mm).
3. Mounting hardware can accommodate shaft centerline height from 5" (127 mm) above to 5" below stringer mounting surface.
4. L-brackets can be inverted for shaft center height from 2" (51 mm) to 5" below mounting surface of stringer. A 1" (25 mm) additional clearance between stringers is needed.